
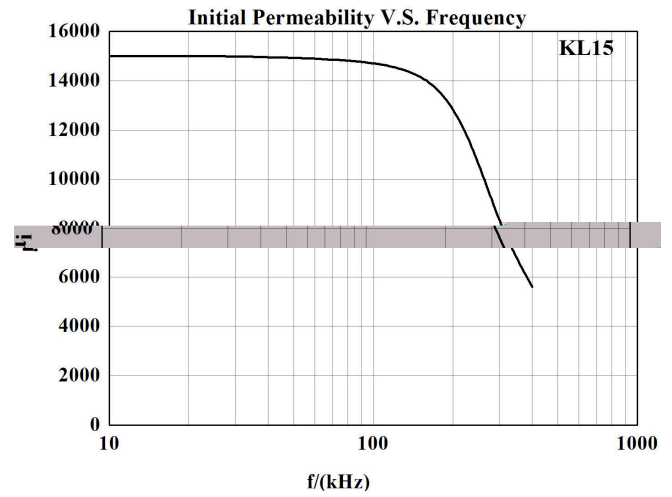


## KL15 材料特性

### Material Characteristics

特性 Symbol	单位 Unit	测试条件 Conditions		典型值 Value
初始磁导 $\mu_i$ Initial permeability ( $\pm 25\%$ )		10kHz $B < 0.25\text{mT}$	25°C	15000
比损耗因子 $\tan\delta/\mu_i$ Relative loss factor		10kHz $B < 0.25\text{mT}$	25°C	$\leq 7.0 \times 10^{-6}$
初始磁导率温度系数 Temperature factor of initial permeability	/°C		20~60°C	$-0.5 \sim 1.5 \times 10^{-6}$
饱和磁通密度 $B_s$ Saturation flux density	mT			360
剩磁 $B_r$ Residual magnetic flux density	mT	60 Hz 1194 A/m	25°C	80
矫顽力 $H_c$ Coercive force	A/m			2.7
减落因子 DF Disaccommodation factor				
居里温度 $T_c$ Curie temperature	°C			105
电阻率 Resistivity	$\Omega \cdot \text{m}$		25°C	0.2
密度 $d$ Density	$\text{g/cm}^3$		25°C	$4.9 \times 10^3$

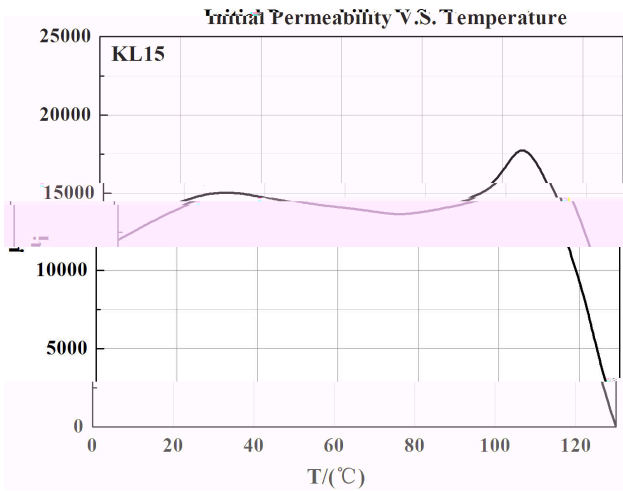

以上数据是根据标准样环  $\phi 25 \times \phi 15 \times 7.5$  获得的典型数据，有关产品的具体性能会在此基础上有所调整。

The above typical data are calculated from the standard toroid core. Specific performance of the product will be adjusted on this basis.